


DATA SHEET

2835 ULTRA HIGH CRI 24W LED STRIP LIGHT

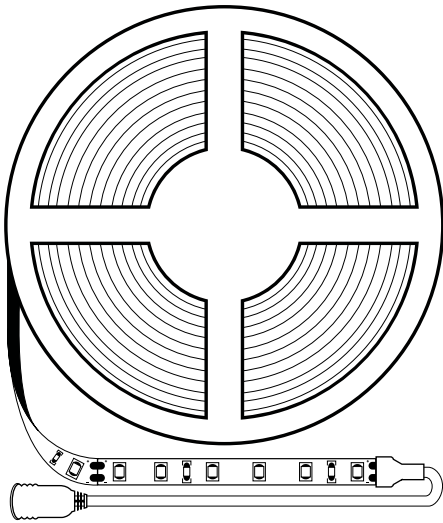

Product Description

For any application where the appearance of displayed objects is tremendously important, there is no equivalent of Solid Apollo's ULTRA High CRI 2835 24W. This strip has an incredibly high Color Rendering Index up to 97+, and is able to bring out the original authentic colors of objects much better than regular LED strip lights. Even hard to render colors like vivid reds and deep blues are highly rated from 87 to 97 where other LED strips lack. The main features of the strip include:

- UL Listed for Safety and Durability.
- High Color Rendering Index up to 97+.
- Includes female barrel connector for easy setup.
- Clearly marked cut points every 3.9".
- Easy installation with a built-in 3M tape.
- Fully dimmable to any desired brightness with optional Dimmers.
- Wide range of white color temperatures to choose from (see table below).


Quick Spec.

- **Fully Dimmable:** Yes
- **Voltage:** 24V DC
- **Total Wattage:** 24W
- **Beam Angle:** 118°-119°
- **UL Rating #:** E493881
- **PCB Width:** 8mm / 0.3"
- **Dimensions:** 196.8" x 0.3" x 0.05"
- **Working Temperature:** -40° to 122°F

300 LEDs
16.4ft

**UP TO 140+
LUMENS / FT**

2835 LED Strip Illustration

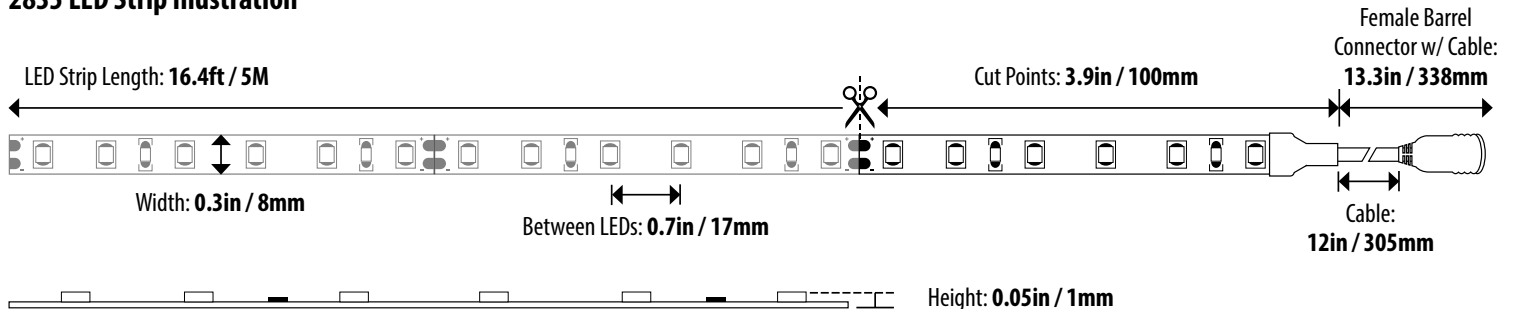


Technical Information

Available LED Color	SKU#	Temp (K)	Total LEDs	Lumens / Ft.	Max Wattage	LED Type	Color Rendering Index	Minimum Cut
Candlelight Warm White	SA-LS-ULTRA-CLWW-2835-300-24V	2400K	300	113	24W	SMD 2835	95+	3.9in / 100mm
Super Warm White	SA-LS-ULTRA-SWW-2835-300-24V	2700K	300	121	24W	SMD 2835	96+	3.9in / 100mm
Warm White	SA-LS-ULTRA-WW-2835-300-24V	3000K	300	123	24W	SMD 2835	97+	3.9in / 100mm
Neutral Warm White	SA-LS-ULTRA-NWW-2835-300-24V	3500K	300	138	24W	SMD 2835	97+	3.9in / 100mm
Daylight White	SA-LS-ULTRA-DLW-2835-300-24V	4000K	300	137	24W	SMD 2835	96+	3.9in / 100mm
Natural White	SA-LS-ULTRA-NW-2835-300-24V	5000K	300	140	24W	SMD 2835	96+	3.9in / 100mm
White	SA-LS-ULTRA-W-2835-300-24V	6000K	300	149	24W	SMD 2835	96+	3.9in / 100mm

2835 ULTRA HIGH CRI 24W LED STRIP LIGHT PHOTOMETRICS

Candlelight Warm White (2400K)

SKU: SA-LS-ULTRA-CLWW-2835-300-24V

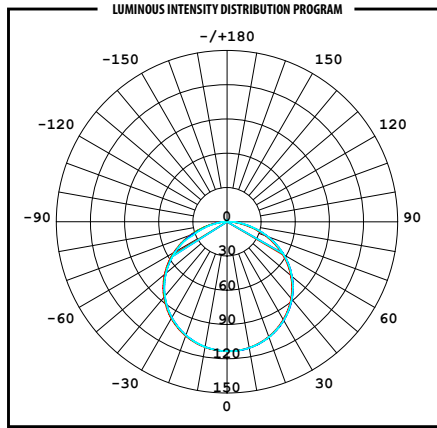


AVERAGE BEAM ANGLE (50%): **118.3 DEG**

UNIT: cd


- C0 / 180, 118.3
- C60 / 240, 118.4
- C30 / 210, 118.4
- C90 / 270, 118.2

DEG.	Luminous Intensity: cd										DEG.
g	C0	C45	C90	C135	C180	C225	C270	C315	g		
10	112.0	112.2	112.2	111.9	111.6	111.3	111.3	111.5	0-10		
20	107.2	107.7	107.6	107.1	106.4	105.8	105.8	106.2	10-20		
30	99.04	99.90	99.67	99.01	97.95	97.00	97.00	97.59	20-30		
40	87.68	88.90	88.59	87.77	86.34	85.08	85.07	85.83	30-40		
50	73.28	74.86	74.48	73.51	71.69	70.19	70.07	71.03	40-50		
60	56.07	57.83	57.63	56.35	54.25	52.68	52.46	53.51	50-60		
70	36.39	38.55	38.42	36.93	34.55	33.11	29.52	33.67	60-70		
80	16.24	18.65	19.02	17.18	14.73	11.89	12.55	11.51	70-80		
90	1.540	4.289	4.774	3.402	1.273	1.976	2.107	1.968	80-90		
100	0.4106	0.9361	0.8807	0.4274	0.4191	0.4518	0.5175	0.3614	90-100		
110	0.6733	0.7888	0.6649	0.7806	0.6410	0.5583	0.6491	0.5420	100-110		
120	0.9279	1.076	1.035	1.035	0.8790	0.7884	0.8461	0.7801	110-120		
130	1.158	1.232	1.338	1.191	1.068	0.9610	1.027	0.9526	120-130		
140	1.216	1.356	1.519	1.355	1.282	1.223	1.200	1.166	130-140		
150	1.322	1.479	1.585	1.462	1.479	1.429	1.397	1.322	140-150		
160	1.404	1.577	1.594	1.536	1.643	1.544	1.643	1.552	150-160		
170	1.470	1.643	1.594	1.585	1.717	1.643	1.799	1.684	160-170		
180	1.725	1.733	1.832	1.750	1.717	1.709	1.856	1.709	170-180		

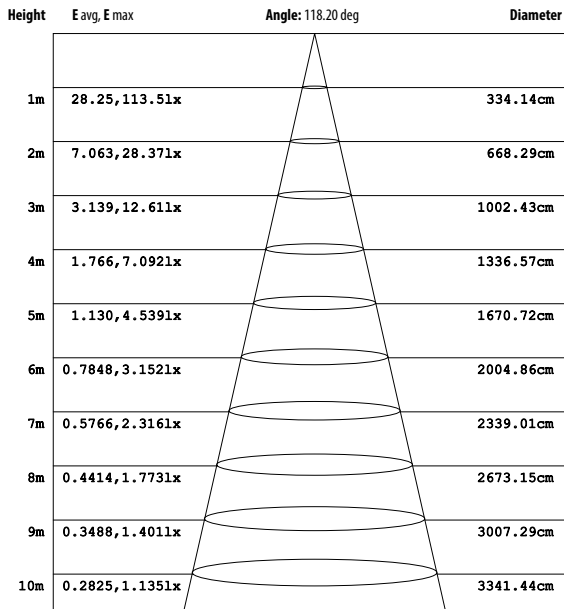


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

CIE1931 CHROMATICITY DIAGRAM

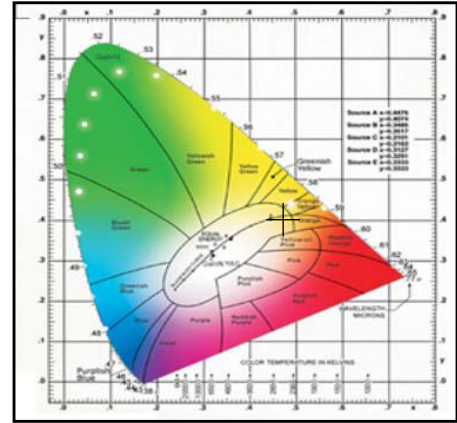


X = 0.4831 Y = 0.4043 CCT = 2359K

SPECTRAL DISTRIBUTION

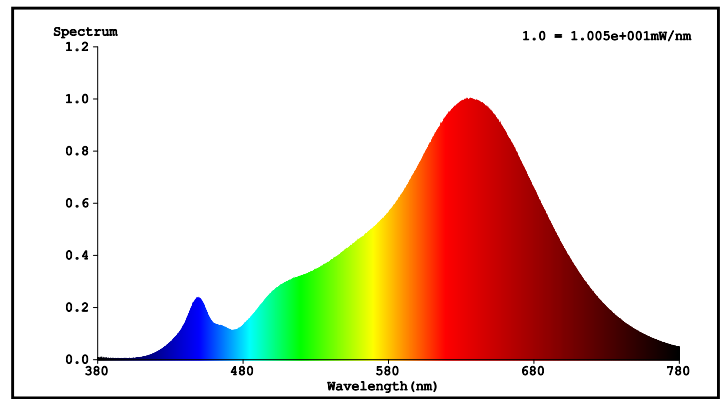


COLOR RENDERING INDEX (CRI) GRAPH

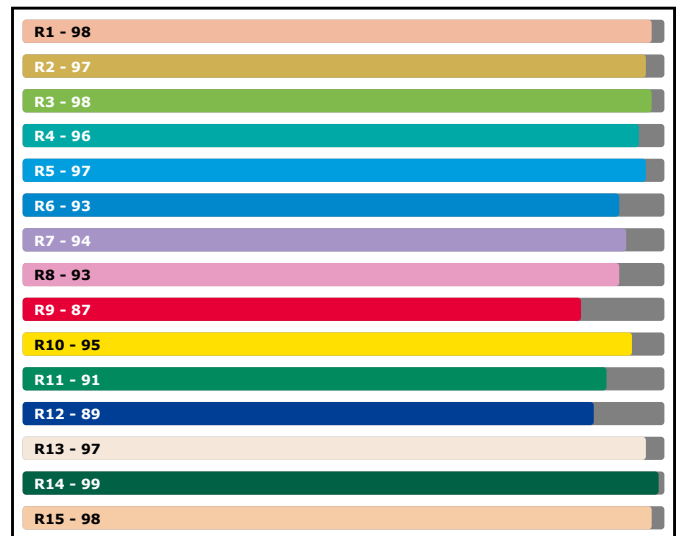

2835 ULTRA HIGH CRI 24W LED STRIP LIGHT PHOTOMETRICS

Super Warm White (2700K)

SKU: SA-LS-ULTRA-SWW-2835-300-24V

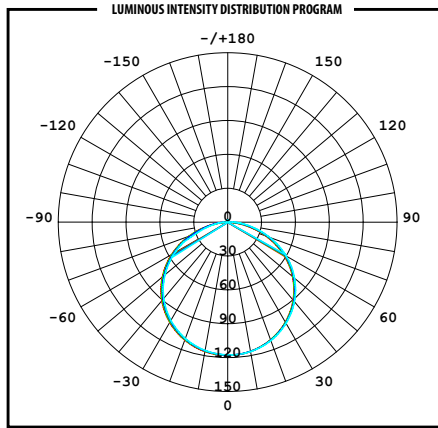


AVERAGE BEAM ANGLE (50%): 118.3 DEG

UNIT: cd

- C0 / 180, 118.3
- C60 / 240, 118.4
- C30 / 210, 118.4
- C90 / 270, 118.2


DEG.	Luminous Intensity: cd										DEG.
g	C0	C45	C90	C135	C180	C225	C270	C315			g
10	116.4	116.3	116.5	116.4	116.4	115.9	115.5	115.5			0-10
20	111.1	111.4	111.8	111.7	111.3	110.4	109.8	109.7			10-20
30	102.4	103.0	103.6	103.6	102.7	101.6	100.7	100.6			20-30
40	90.41	91.38	92.12	92.13	90.79	89.42	88.33	88.19			30-40
50	75.30	76.48	77.51	77.43	75.66	74.16	72.72	72.69			40-50
60	57.22	58.70	60.00	59.79	57.61	55.90	54.37	54.28			50-60
70	36.62	38.58	40.09	39.74	37.05	35.43	30.60	33.73			60-70
80	15.73	18.20	20.32	19.34	16.08	13.63	13.47	11.85			70-80
90	1.241	4.421	6.746	5.060	1.224	2.865	3.254	2.535			80-90
100	0.4514	0.6080	1.112	0.5257	0.4110	0.4271	0.4684	0.4354			90-100
110	0.7225	0.8381	0.6896	0.7888	0.6575	0.5665	0.6656	0.5830			100-110
120	1.018	1.134	1.059	1.068	0.8955	0.7884	0.8710	0.8047			110-120
130	1.183	1.298	1.421	1.232	1.109	1.010	1.076	1.010			120-130
140	1.314	1.438	1.577	1.380	1.331	1.281	1.240	1.183			130-140
150	1.331	1.528	1.610	1.495	1.528	1.454	1.454	1.388			140-150
160	1.421	1.643	1.610	1.610	1.700	1.577	1.709	1.601			150-160
170	1.577	1.709	1.684	1.651	1.750	1.700	1.898	1.708			160-170
180	1.733	1.807	1.897	1.799	1.750	1.799	1.955	1.741			170-180

CIE1931 CHROMATICITY DIAGRAM

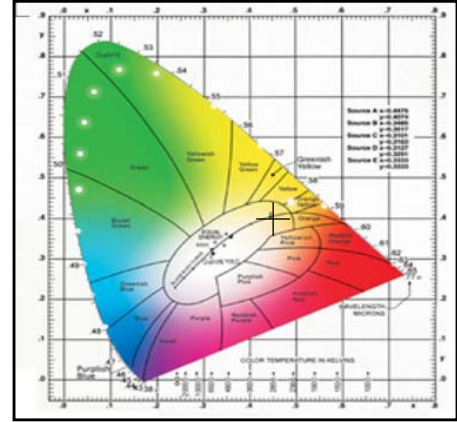

X = 0.4540 Y = 0.4022 CCT = 2717K


SPECTRAL DISTRIBUTION

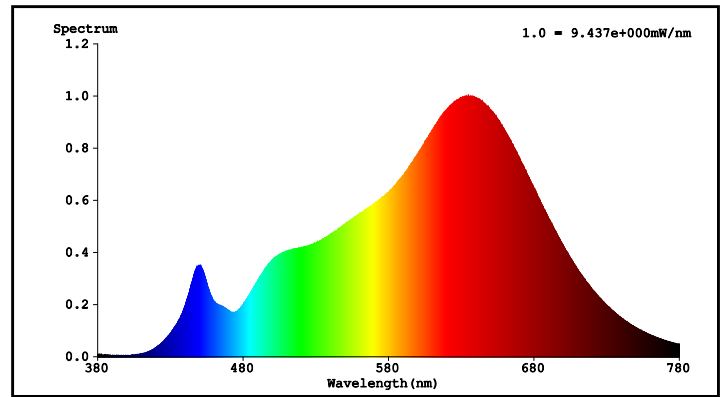

Height E avg, E max Angle: 118.06 deg Diameter

1m	29.36, 118.11x	333.22cm
2m	7.340, 29.521x	666.44cm
3m	3.262, 13.121x	999.66cm
4m	1.835, 7.3801x	1332.88cm
5m	1.174, 4.7231x	1666.09cm
6m	0.8155, 3.2801x	1999.31cm
7m	0.5992, 2.4101x	2332.53cm
8m	0.4587, 1.8451x	2665.75cm
9m	0.3625, 1.4581x	2998.97cm
10m	0.2936, 1.1811x	3332.19cm

COLOR RENDERING INDEX (CRI) GRAPH

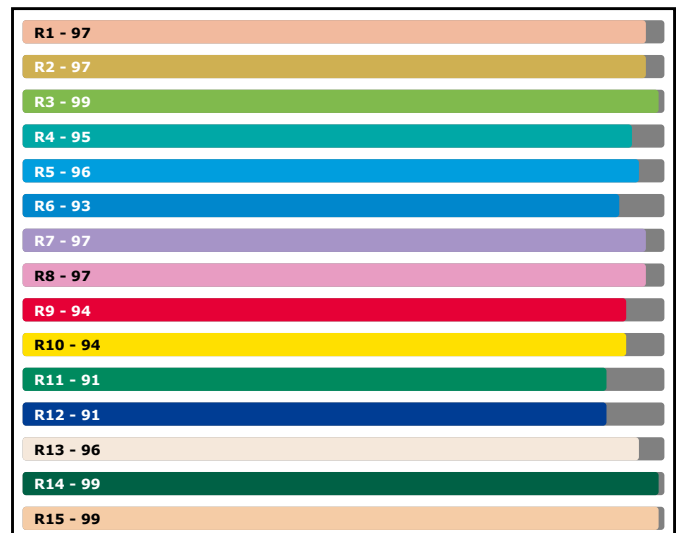


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

2835 ULTRA HIGH CRI 24W LED STRIP LIGHT PHOTOMETRICS

Warm White (3000K) & Neutral Warm White (3500K)

SKU: SA-LS-ULTRA-WW-2835-300-24V & SA-LS-ULTRA-NWW-2835-300-24V

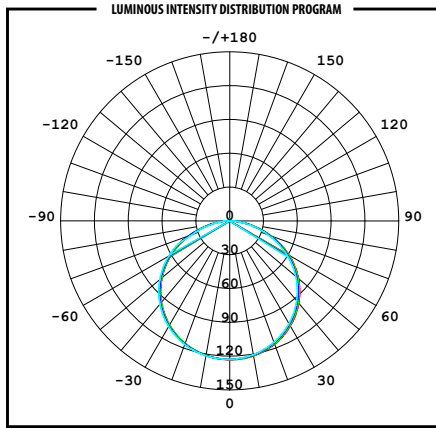


AVERAGE BEAM ANGLE (50%): 118.7 DEG


UNIT: cd

- CO / 180, 118.7
- C60 / 240, 118.7
- C30 / 210, 118.7
- C90 / 270, 118.6


DEG.	Luminous Intensity: cd											DEG.
g	C0	C45	C90	C135	C180	C225	C270	C315	g			
10	121.7	121.0	120.6	120.6	121.3	121.3	121.6	121.6	121.6	0-10		
20	116.4	115.5	114.7	114.7	115.7	116.0	116.7	116.7	116.7	10-20		
30	107.6	106.6	105.3	105.5	106.7	107.2	108.3	108.2	108.2	20-30		
40	95.37	94.27	92.54	92.82	94.30	94.93	96.36	96.23	96.23	30-40		
50	79.80	78.48	76.67	76.83	78.50	79.43	80.94	80.92	80.92	40-50		
60	60.94	59.72	57.71	57.92	59.69	60.68	62.44	62.35	62.35	50-60		
70	39.41	38.46	36.58	36.67	38.24	39.31	35.66	40.95	40.95	60-70		
80	17.34	17.10	16.33	15.67	16.47	15.57	15.41	16.23	16.23	70-80		
90	1.680	2.935	2.703	2.344	1.363	3.178	3.255	3.727	3.727	80-90		
100	0.5006	0.5424	0.5093	0.5507	0.4438	0.4108	0.4436	0.5180	0.5180	90-100		
110	0.7717	0.9203	0.8289	0.9284	0.7066	0.5748	0.6409	0.5585	0.5585	100-110		
120	1.027	1.232	1.223	1.199	0.9449	0.8048	0.8627	0.7884	0.7884	110-120		
130	1.240	1.396	1.569	1.355	1.167	1.060	1.068	1.026	1.026	120-130		
140	1.339	1.512	1.717	1.512	1.397	1.306	1.249	1.199	1.199	130-140		
150	1.429	1.643	1.750	1.618	1.610	1.487	1.487	1.454	1.454	140-150		
160	1.487	1.717	1.750	1.692	1.783	1.643	1.758	1.651	1.651	150-160		
170	1.618	1.774	1.750	1.725	1.865	1.799	1.955	1.807	1.807	160-170		
180	1.856	1.873	1.988	1.906	1.865	1.865	1.988	1.832	1.832	170-180		




X = 0.4404 Y = 0.4026 CCT = 2930K

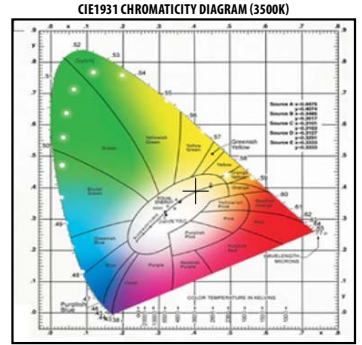

X = 0.4065 Y = 0.3916 CCT = 3482K

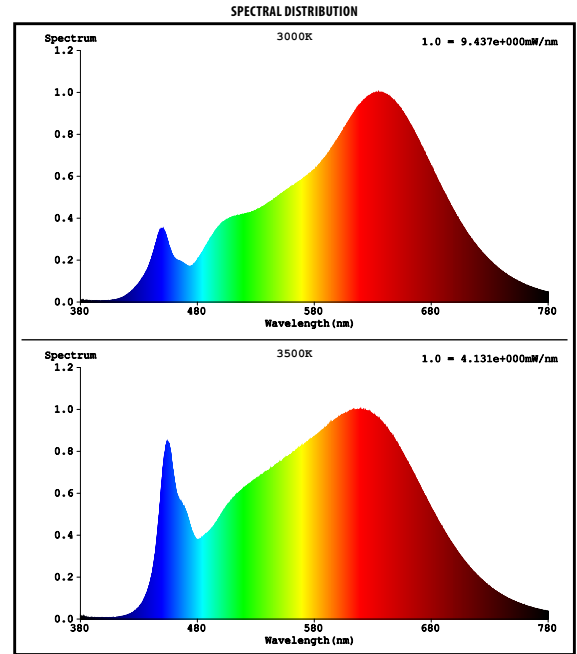

Height	E avg, E max	Angle: 118.61 deg	Diameter
1m	30.74, 123.21x		336.00cm
2m	7.685, 30.801x		672.01cm
3m	3.415, 13.691x		1008.01cm
4m	1.921, 7.7001x		1344.02cm
5m	1.230, 4.9281x		1680.02cm
6m	0.8539, 3.4221x		2016.03cm
7m	0.6273, 2.5141x		2352.03cm
8m	0.4803, 1.9251x		2688.04cm
9m	0.3795, 1.5211x		3024.04cm
10m	0.3074, 1.2321x		3360.04cm

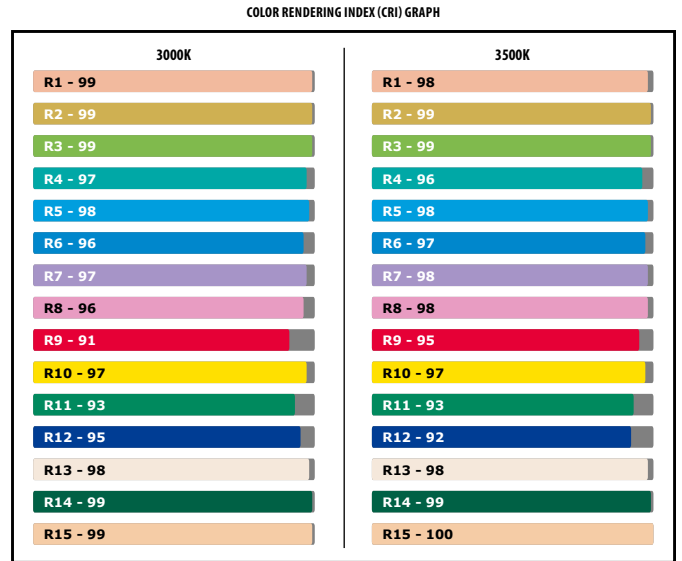


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

2835 ULTRA HIGH CRI 24W LED STRIP LIGHT PHOTOMETRICS

Daylight White (4000K)


SKU: SA-LS-ULTRA-DLW-2835-300-24V

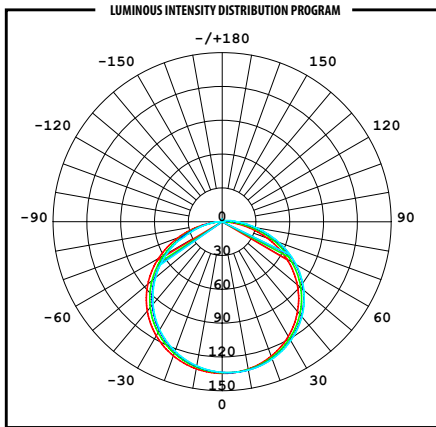

AVERAGE BEAM ANGLE (50%): 119.0 DEG

UNIT: cd



- C0 / 180, 118.8
- C60 / 240, 119.2
- C30 / 210, 119.0
- C90 / 270, 119.2

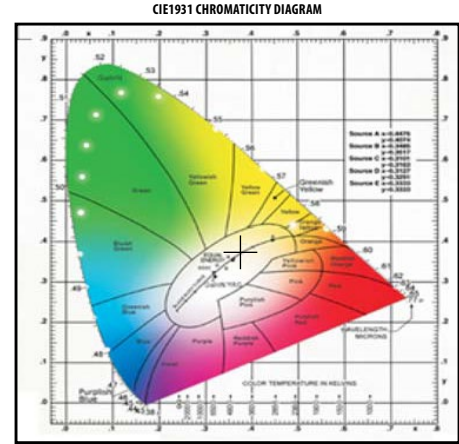


X = 0.3823 Y = 0.3781 CCT = 3960K

DEG.	Luminous Intensity: cd										DEG.
g	C0	C45	C90	C135	C180	C225	C270	C315	g		
10	132.8	133.4	133.7	133.0	132.6	130.5	129.9	130.5	0-10		
20	127.1	129.1	129.7	128.5	126.7	123.3	122.3	123.4	10-20		
30	117.5	120.9	121.8	120.2	117.0	112.2	110.8	112.4	20-30		
40	104.1	108.9	110.1	108.0	103.5	97.43	95.55	97.70	30-40		
50	87.13	93.11	94.80	92.06	86.24	79.23	77.20	79.53	40-50		
60	66.46	73.82	75.78	72.63	65.59	58.19	57.04	58.46	50-60		
70	42.85	51.42	53.65	50.07	41.96	35.87	32.65	36.16	60-70		
80	18.83	27.90	30.68	26.50	18.07	13.80	14.55	11.74	70-80		
90	1.761	10.14	13.80	9.306	1.632	2.338	2.540	2.010	80-90		
100	0.5255	3.579	6.749	0.4602	0.4849	0.5339	0.5999	0.5091	90-100		
110	0.8375	1.346	3.477	0.8462	0.7723	0.7552	0.8463	0.7471	100-110		
120	1.158	1.175	1.252	1.150	1.035	0.9854	1.068	0.9609	110-120		
130	1.371	1.388	1.486	1.339	1.273	1.199	1.274	1.183	120-130		
140	1.486	1.561	1.716	1.512	1.528	1.478	1.479	1.421	130-140		
150	1.585	1.717	1.815	1.668	1.766	1.692	1.692	1.602	140-150		
160	1.699	1.848	1.815	1.791	1.955	1.832	1.972	1.840	150-160		
170	1.766	1.930	1.881	1.840	2.021	1.963	2.152	1.955	160-170		
180	2.012	2.037	2.152	2.029	2.021	2.037	2.144	1.996	170-180		

SPECTRAL DISTRIBUTION

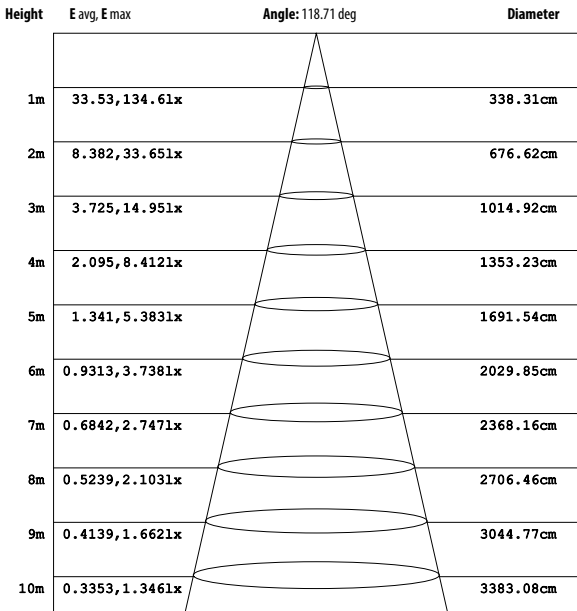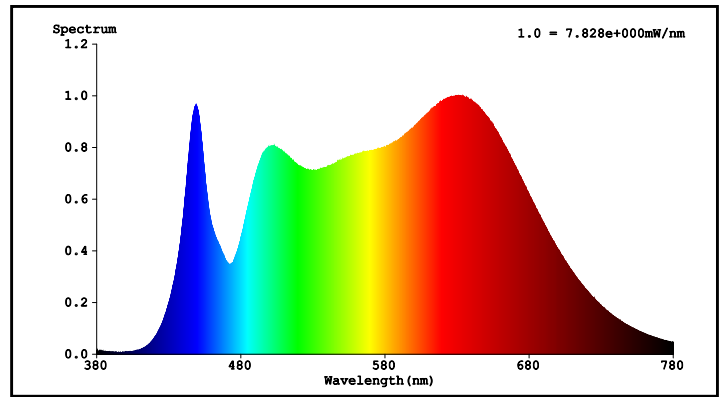

COLOR RENDERING INDEX (CRI) GRAPH

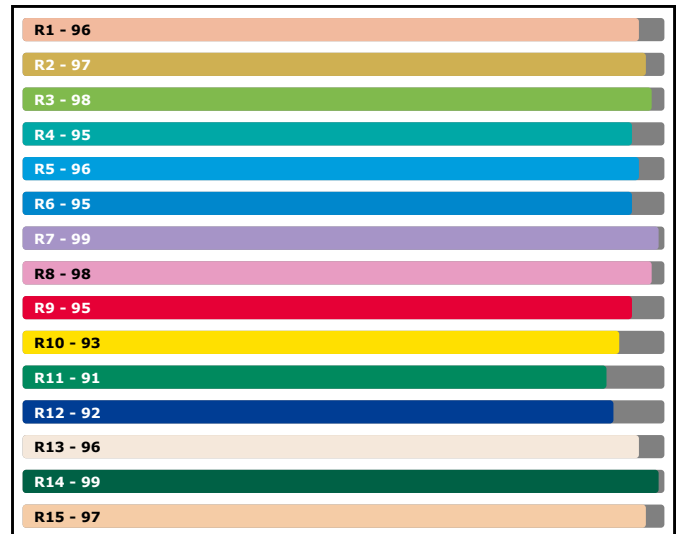


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

2835 ULTRA HIGH CRI 24W LED STRIP LIGHT PHOTOMETRICS

Natural White (5000K)

SKU: SA-LS-ULTRA-NW-2835-300-24V

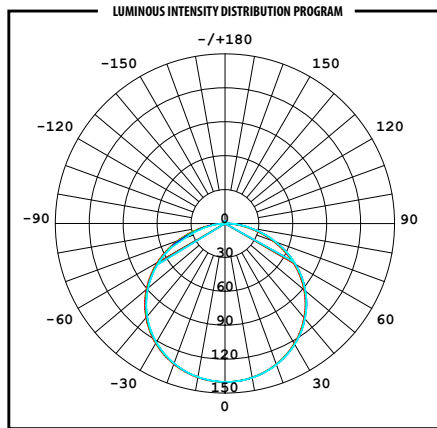


AVERAGE BEAM ANGLE (50%): 119.6 DEG

UNIT: cd

- C0 / 180, 119.6
- C60 / 240, 119.6
- C30 / 210, 119.7
- C90 / 270, 119.5


DEG.	Luminous Intensity: cd										DEG.
g	C0	C45	C90	C135	C180	C225	C270	C315	g		
10	138.3	138.5	138.5	138.4	138.3	138.0	137.9	138.0	0-10		
20	132.5	132.9	132.9	132.7	132.4	131.8	131.7	131.9	10-20		
30	122.7	123.5	123.4	123.2	122.5	121.5	121.4	121.7	20-30		
40	109.0	110.2	110.1	109.7	108.6	107.3	107.1	107.6	30-40		
50	91.43	92.94	92.95	92.23	90.78	89.16	88.87	89.65	40-50		
60	70.06	72.11	72.03	71.07	69.22	67.15	66.92	67.85	50-60		
70	45.52	48.05	47.91	46.71	44.48	42.16	37.06	42.88	60-70		
80	20.38	22.99	22.96	21.52	19.36	15.49	14.89	15.29	70-80		
90	2.199	4.872	5.219	4.058	1.877	2.036	1.760	2.593	80-90		
100	0.5500	0.7718	0.8880	0.5507	0.5177	0.4764	0.5342	0.4846	90-100		
110	0.9113	0.9861	0.8862	0.9696	0.8052	0.7144	0.8052	0.7062	100-110		
120	1.215	1.372	1.330	1.323	1.085	0.9772	1.060	0.9609	110-120		
130	1.462	1.561	1.725	1.511	1.331	1.207	1.290	1.207	120-130		
140	1.569	1.717	1.938	1.700	1.602	1.544	1.495	1.445	130-140		
150	1.610	1.865	1.971	1.823	1.848	1.733	1.750	1.676	140-150		
160	1.717	1.988	1.980	1.938	2.037	1.889	2.054	1.988	150-160		
170	1.864	2.045	2.004	1.971	2.136	2.094	2.267	2.119	160-170		
180	2.095	2.144	2.267	2.201	2.119	2.144	2.292	2.136	170-180		

CIE1931 CHROMATICITY DIAGRAM

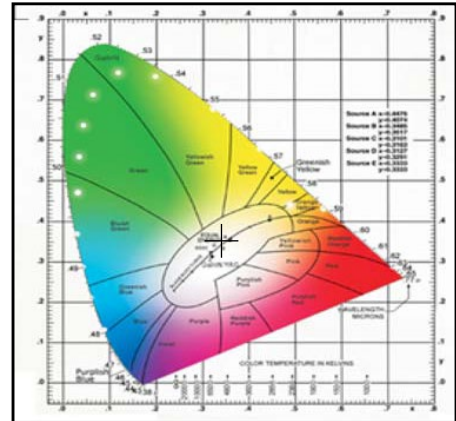


X = 0.3462 Y = 0.3535 CCT = 4965K

SPECTRAL DISTRIBUTION

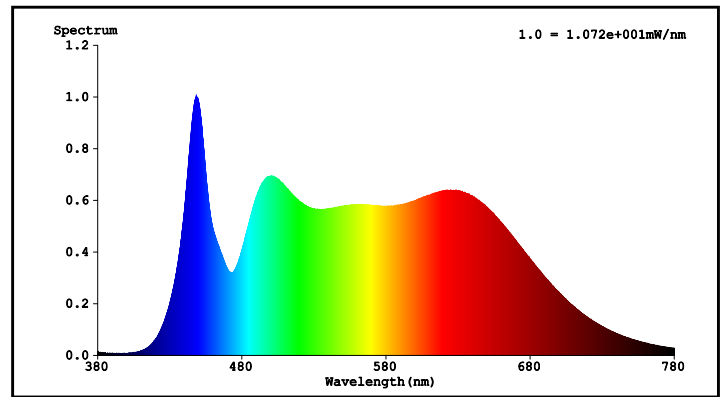

Height	E avg, E max	Angle: 119.33 deg	Diameter
1m	35.30, 140.21x		342.71cm
2m	8.826, 35.051x		685.42cm
3m	3.922, 15.581x		1028.12cm
4m	2.206, 8.7631x		1370.83cm
5m	1.412, 5.6081x		1713.54cm
6m	0.9806, 3.8951x		2056.25cm
7m	0.7205, 2.8611x		2398.96cm
8m	0.5516, 2.1911x		2741.66cm
9m	0.4358, 1.7311x		3084.37cm
10m	0.3530, 1.4021x		3427.08cm

COLOR RENDERING INDEX (CRI) GRAPH

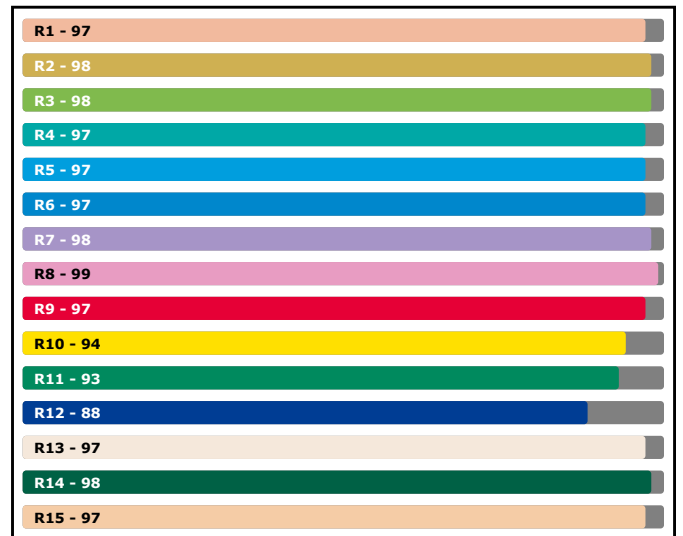


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

2835 ULTRA HIGH CRI 24W LED STRIP LIGHT PHOTOMETRICS

White (6000K)

SKU: SA-LS-ULTRA-W-2835-300-24V

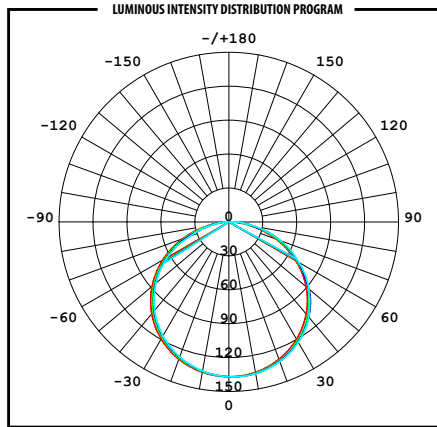


AVERAGE BEAM ANGLE (50%): 119.1 DEG

UNIT: cd

- C0 / 180, 119.7
- C60 / 240, 118.9
- C30 / 210, 119.2
- C90 / 270, 118.8


DEG.	Luminous Intensity: cd										DEG.
g	C0	C45	C90	C135	C180	C225	C270	C315	g		
10	135.1	135.9	136.2	135.8	135.0	134.2	133.9	134.3	0	10	
20	129.4	131.0	131.5	130.9	129.3	127.6	127.1	127.0	10	20	
30	119.8	122.3	122.9	122.2	119.6	117.3	116.6	117.0	20	30	
40	106.4	109.6	109.9	109.2	106.1	102.6	102.2	103.1	30	40	
50	89.28	92.49	92.29	92.18	88.64	84.97	84.20	85.36	40	50	
60	68.49	71.29	71.28	70.47	67.68	63.76	62.89	64.24	50	60	
70	44.51	48.28	48.96	46.65	43.55	39.89	35.98	40.19	60	70	
80	20.19	23.03	24.45	22.21	19.06	12.60	14.59	14.47	70	80	
90	2.313	5.553	5.580	4.465	1.610	1.830	2.204	2.567	80	90	
100	0.5581	1.207	1.366	0.5587	0.5177	0.5171	0.6244	0.8955	90	100	
110	0.8868	0.9777	0.8376	0.9612	0.8052	0.7552	0.8544	0.7309	100	110	
120	1.199	1.314	1.289	1.265	1.068	1.002	1.068	0.9772	110	120	
130	1.429	1.511	1.659	1.446	1.315	1.224	1.298	1.215	120	130	
140	1.561	1.676	1.848	1.627	1.577	1.576	1.503	1.446	130	140	
150	1.593	1.807	1.914	1.766	1.824	1.733	1.734	1.684	140	150	
160	1.709	1.930	1.914	1.881	2.004	1.881	2.037	1.889	150	160	
170	1.823	2.004	1.963	1.930	2.119	2.061	2.226	2.037	160	170	
180	2.119	2.127	2.226	2.144	2.119	2.103	2.226	2.111	170	180	

CIE1931 CHROMATICITY DIAGRAM

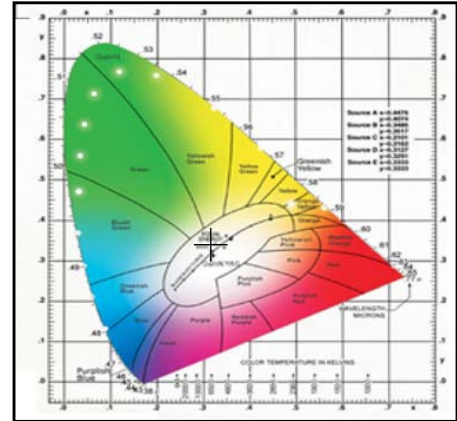


X=0.3212 Y=0.3399 CCT=6016K

SPECTRAL DISTRIBUTION

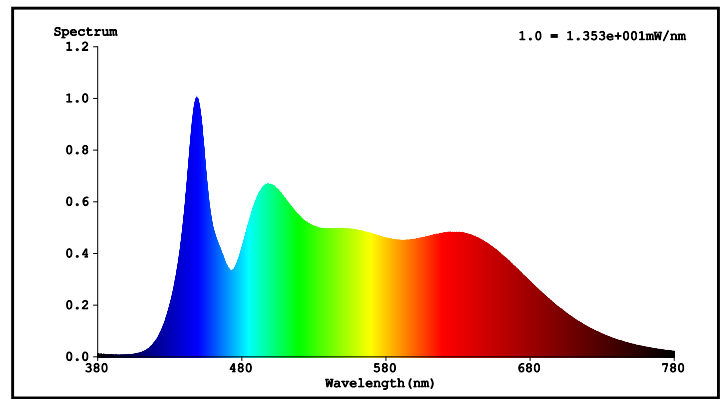


Height	E avg, E max	Angle: 118.89 deg	Diameter
1m	34.44, 137.01x		337.88cm
2m	8.609, 34.261x		675.76cm
3m	3.826, 15.231x		1013.64cm
4m	2.152, 8.5641x		1351.52cm
5m	1.378, 5.4811x		1689.40cm
6m	0.9566, 3.8061x		2027.28cm
7m	0.7028, 2.7961x		2365.16cm
8m	0.5381, 2.1411x		2703.04cm
9m	0.4252, 1.6921x		3040.93cm
10m	0.3444, 1.3701x		3378.81cm

COLOR RENDERING INDEX (CRI) GRAPH

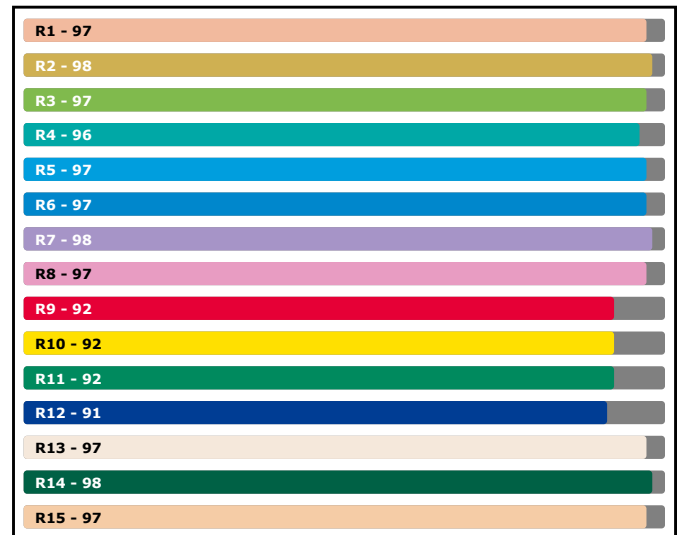


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


Dimmers

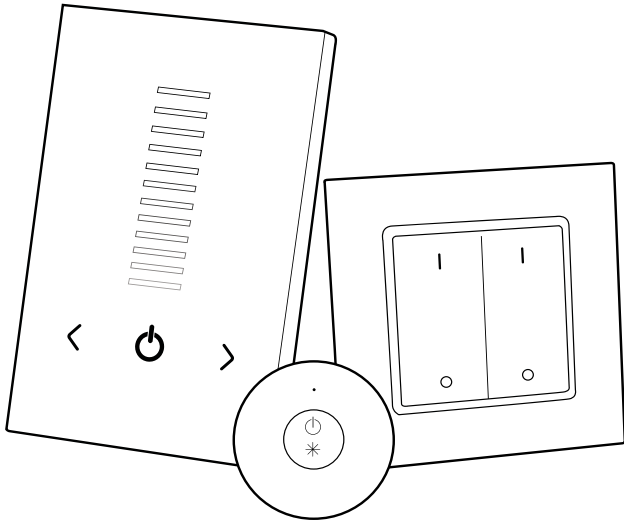


LED Strip Connectors

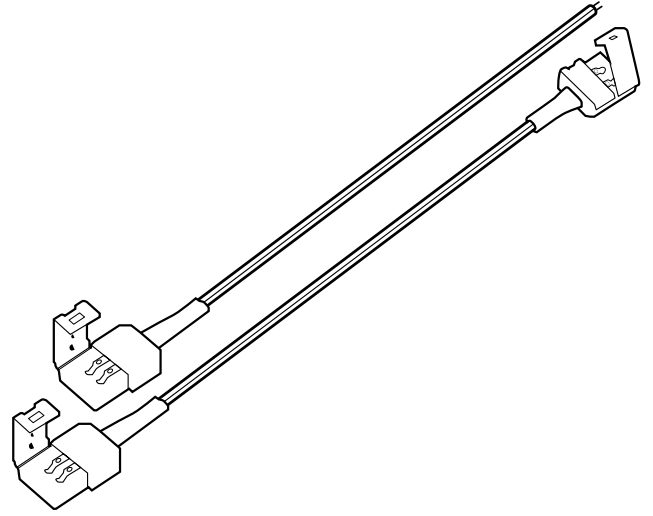

Power Supplies

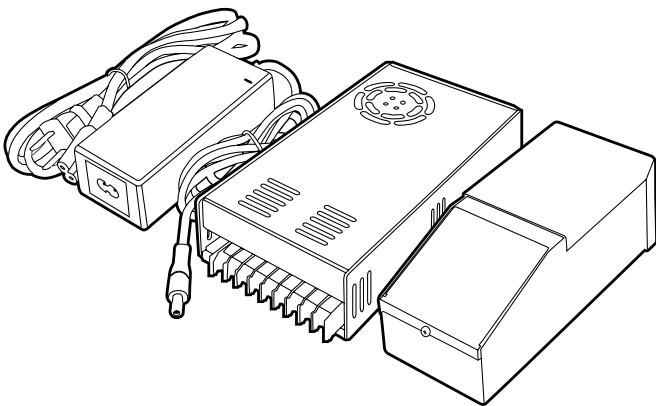


LED Strip Channels

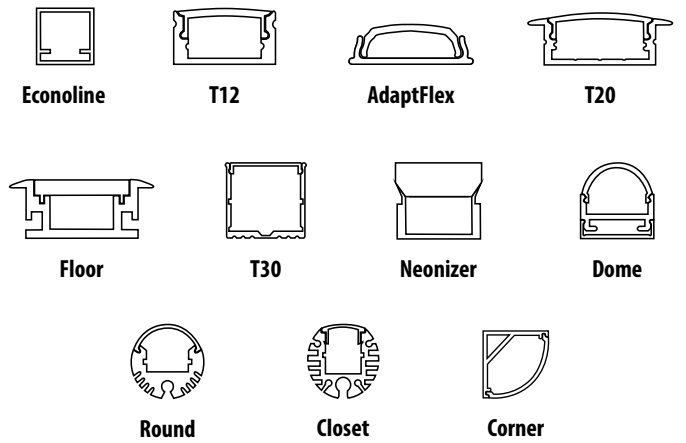


2835 ULTRA HIGH CRI 24W LED STRIP LIGHT INSTALLATION GUIDE


1. Determine where to install the Driver and optional Dimmer.

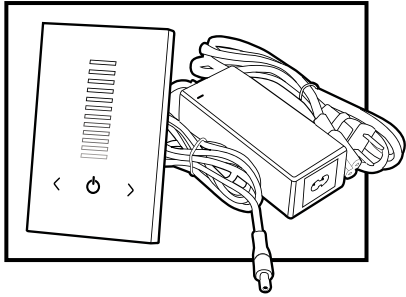


2. Determine the measurement of area where LED Strip Lights will be placed.

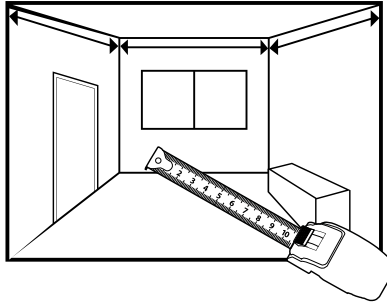


3. Determine how much wire needed (Driver to Dimmer, Dimmer to LED Strips).

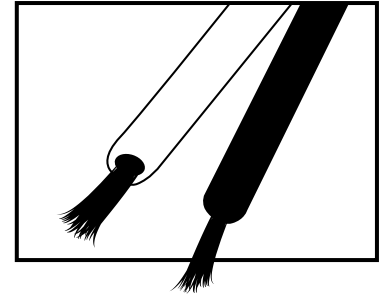

4. Cut LED Strip Lights (at cutting points) to fit or Join multiple Strips as recommended to cover installation area.

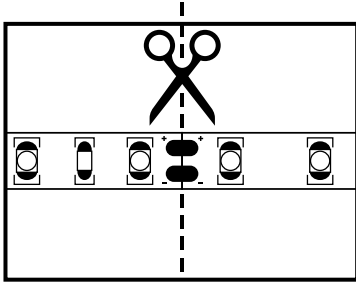


5. If using Channels, cut or extend them to fit size of the installation area

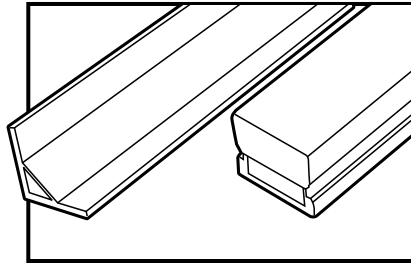


6. Thoroughly clean the surface where the LED Strip will be mounted.




7. A. Peel the 3M Tape cover from the back of the LED Strips and mount it on surface.

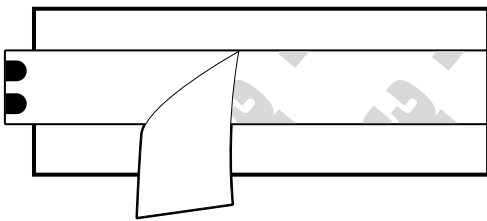

B. If using Channels, mount the LED Strip in the Channel and mount it to the desired surface.



8. Complete the connection/wiring between the Power Supply, optional dimmer and LED Strips.

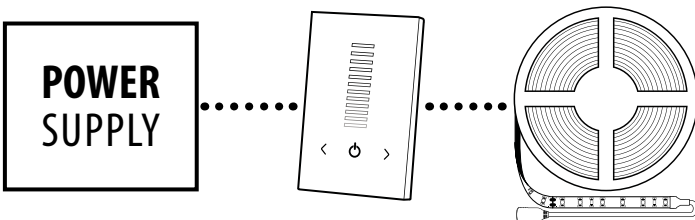


9. Power up and enjoy!


Note: If you have questions and concerns regarding the installation process. Please feel free to contact us at 425.582.7533. We will gladly assist you.

2835 ULTRA HIGH CRI 24W LED STRIP LIGHT WARNINGS


Do not power LED Strip still coiled in spool.




Do not bend LED Strip sideways.




Do not bend LED strips to a diameter less than 1.5 inches.




Do not fold or crease LED Strip.




Do not twist LED Strip.




Do not cover LED Strip with anything other than LED Channel Diffusers.




Do not put direct excessive pressure on the LED surface.





Do not cut LED Strips except at designated cutting points.



Do not position LED at an angled surface where it is pressed.



Do not connect or interconnect more than 16 feet (5 meters) of LED Strip to one Power Feed.

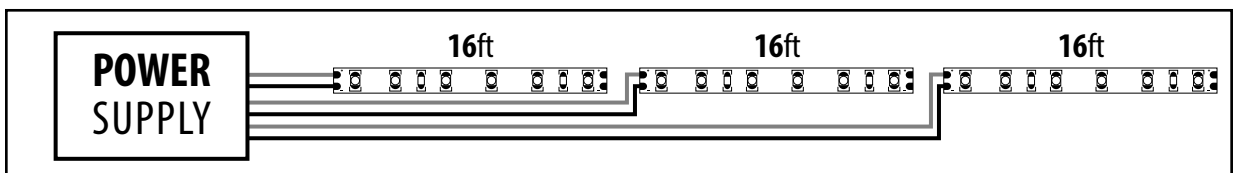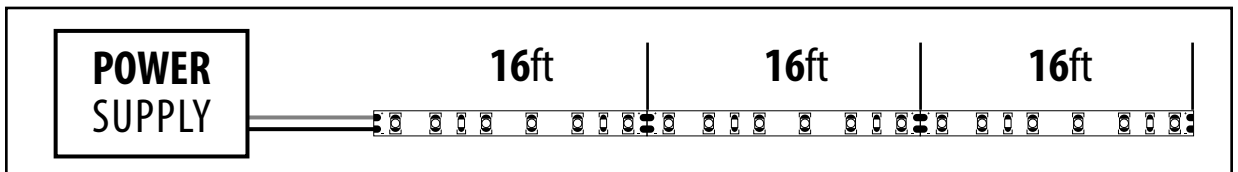

2835 ULTRA HIGH CRI 24W LED STRIP LIGHT SAFETY & WARRANTY

Safety / Disclosures

1. Please follow the included installation guide for proper installation procedure (See pg. 9).
2. Install in accordance with your national or local electrical code regulations.
3. Not suitable for wet locations.
4. Do not expose LED chips to direct sunlight continuously.
5. Do not expose to heat more than the specified Temperature ratings and do not install too close to stoves, fireplaces, and so on.
6. Only install with the required Driver/Power Supply – 24V DC Constant Voltage Driver.
7. Use a separate power feed for each recommended maximum run.
8. Only use cables that are certified for use with external connection of electrical equipment and rated for at least 80°C (176°F)
9. Do not mishandle product or modify beyond the guidelines given as this may void product Warranty.
10. Only use the recommended accessories and wires to connect between LED Strip Light, Driver, Controller, and other devices in between.
11. The output color of the LED Strips may have slight variation from that of the pictures on this document or website due to photo rendering limitations.
12. Design improvements and modification of the products could happen from to time and we reserve the right to do these improvements necessary without any prior notice.

Warranty

The **2835** ULTRA High CRI 24W LED Strip Lights come with a 5-year limited warranty from the date it is shipped to the customer. This warranty covers the product as long as it is used for the designed purpose and normally operated unless otherwise stated.

Please visit www.solidapollo.com/returns-amp-warranty.html for the complete warranty details on the product. For any additional questions about product warranty, feel free to contact customer support at 425.582.7533.